

# YOU **BUILD** WE **CARE**

- Architecture
- Building Project
- Renovation
- Hotel & Resorts
- **\*** Re Construction
- Heavy Work
- **\*** Hospital
- Other Servies





+91 7878 26 36 26

# "COMPANY PROFILE"

'You Build We Care'

# Powerful Brand Comes From Powerful Place.

# Champion is one of them.

We would like to introduce ourselves as a manufacturer of construction chemicals for field of civil industry. we have solutions for each of the civil engineering applications.

Champion group of company is an manufacturing units of construction chemicals.

Which is used to maintain old and new Construction Strength, Durability and Quality.

Champion construction Chemicals has a well equipped laboratory cum R&D centre based at Gujarat in India.

Quality is priority goal that Champion Chemicals has been pursuing firmly, concretely and effectively. to provide international standard product we have been accredited to ISO 9001:2015 standard to emphasis on quality of our products. A strong emphasis is placed on policy of continuous improvement of quality systems with the goal of achieving a zero Defect operation.

We have excellent Solution to remove passing difficulties on old structures like a water penetrate, corrosion in steel, to protect old structure by our range of Products. we planned some products to save environment and reduce pollution by green building products.


our products are very helpful to builders and architecture to reduce their costing with very good quality material. it is also helpful in reducing labour costing and many more

our company's moto is customer satisfaction by saving life of structure, quality work, solution of users difficulties and mainly save environment with eco friendly material. we have range of products for Tile & Stone Fixing Solutions, water proofing systems, concrete admixtures, ready mix plaster, block jointing mortar, decorative coating and cleaners, many more...

our trained production team, technicians, knowledgeable lab team, excellent quality control team makes us more strong to give proper solution in any different stage on different problem in construction. our brand champion is always safe for users, applicants, venders, builders. no human hazards will found in our products. so it is called champion. [Manufactured by Maruti Enterprise]



N.S.A W-20+ is a premium quality, highly polymerized multipurpose adhesive for fixing large format vitrified tiles, and glass mosaic tiles, ceramic tiles, Italian, granite, stone fixing etc. it is remove the problem of debonding Tile of elevation. there is a excellent waterproofing characteristics in Champion Tile adhesive

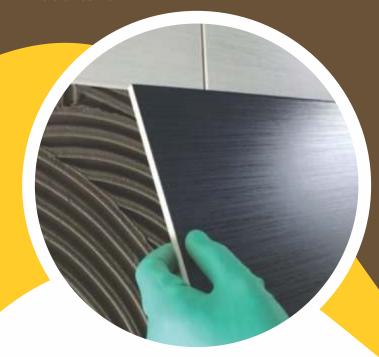

#### **BENEFITS:**

- Strong and Professional finish
- Fast and easy mixing
- No curing Required
- High shear strength
- High tensile strength
- High Adhesion and flexural strength
- Thermal Deformability
- For Internal or external use
- Excellent slip Resistance on vertical Application
- Nil wastages
- Easy to spread



**PACKING**: 20 kg Bag [with double liner packing]

**COVERAGE:** Approx: 30 sq.ft /bag @ 6mm thickness

**COLOUR**: Grev

**SHELF LIFE:** In unopened condition 12 month manufacture

in the originally sealed packaging.

**STORAGE**: The material should be stored under a shed

and in dry condition away from directs sunlight.

**MIXING**: 1 kg champion NSA W-20+ is added to

(200-250)ml of water gradually

 $[powder:water\ ratio::1:0.20+0.25]\ mixed$ 

manually or by a speed drill fitted with a stirrer.

#### RECOMMENDED APPLICATIONS

- Cement Plaster
- Brick or Concrete Masonry
- Tile on Tile
- Block Work
- Concrete
- Cement Render and Screeds
- RCC

#### **QUALITY ASSURANCE:**

All CHAMPION Branded Products are manufactured under strict Quality control supervision as per exact manufacturing specification. Should you find the behavior of the products varying from the claims in the data sheets, please stop the use of the product and claims the nearest Champion Construction Chemicals staff or the distributor for further guidance.



N.S.A W-20 is high quality polymer modified cement based tile adhesive, Specially used for cladding stone or installing medium or large profile ceramic tiles. vitrified tiles, porcelain tiles, or natural stone, it is used for tile on tile application also champion NSA W-20 is also advisable for swimming-pools, wash-room and wet area.



#### **BENEFITS:**

- Fast and Easy mixing
- No curing Required
- High shear & tensile strength
- Strong and Professional finish
- High Adhesion and flexural strength
- High slip Resistance
- Thermal Deformability
- For Internal or external use
- High slip Resistance
- Nil wastages



**PACKING**: 20 kg Bag [with double liner packing]

**COVERAGE:** Approx: 30 sq.ft /bag @ 6mm thickness

**COLOUR**: Grey

**SHELF LIFE:** In unopened condition 12 month manufacture

in the originally sealed packaging.

**STORAGE**: The material should be stored under a shed

and in dry condition away from directs sunlight.

**MIXING**: 1 kg champion NSA W-20 is added to

(200-250)ml of water gradually

[powder: water ratio:: 1:0.20+0.25] mixed manually or by a speed drill fitted with a stirrer.

- Cement Plaster
- Brick or Concrete Masonry
- Tile on Tile
- Block Work
- Concrete
- Cement Render and Screeds
- RCC



NSA T-20 single component cementitious polymer based powder, it contains quality graded silica sand, standard cement, fillers, and chemicals.

it can be mixed with water for installing small and medium size ceramic floor tiles in interior area using the thin-set method of installation. until a lamp free pasty consistency is achieved.



#### **BENEFITS:**

- No curing Required
- Fast and Easy mixing
- High shear & tensile strength
- Strong and Professional finish
- High Adhesion and flexural strength
- For Internal use
- Nil wastages



**PACKING**: 20 kg Bag [with double liner packing]

**COVERAGE:** Approx: 30 sq.ft /bag @ 6mm thickness

**COLOUR**: Grey

**SHELF LIFE:** In unopened condition 12 month manufacture

in the originally sealed packaging.

**STORAGE**: The material should be stored under a shed

and in dry condition away from directs sunlight.

**MIXING**: 1 kg champion NSA T-20 is added to

(200-250)ml of water gradually

[powder : water ratio :: 1:0.20+0.25] mixed

manually or by a speed drill fitted with a stirrer.

- Cement Plaster
- Brick or Concrete Masonry
- Block Work
- Cement Render and Screeds
- RCC



Ready to use cementatious polymer based adhesive. ensures excellent bond on concrete. can be used for interior application on floor and over masonry concrete, cement plaster etc

Notes: for improved performance of chemical use mixed with champion SBR latex.



#### **BENEFITS:**

- No curing Required
- Fast and Easy mixing
- Strong and Professional finish
- For Internal use
- Nil wastages



**PACKING**: 20 kg Bag [with double liner packing]

**COVERAGE:** Approx: 30 sq.ft /bag @ 6mm thickness

**COLOUR**: Grey

**SHELF LIFE:** In unopened condition 12 month manufacture

in the originally sealed packaging.

**STORAGE**: The material should be stored under a shed

and in dry condition away from directs sunlight.

**MIXING**: 1 kg champion NSA 20-20 is added to

(200-250)ml of water gradually

[powder: water ratio:: 1:0.20+0.25] mixed manually or by a speed drill fitted with a stirrer.

- Cement Plaster
- Brick or Concrete Masonry
- Cement Render and Screeds
- RCC



Champion NSA white is a premium quality, highly polymerized white cement based multipurpose Adhesive, having an innovative property which prevents emitting low dust during mixing. suitable for permanent fixing of all sizes and types of ceramic tiles/marble, vitrified tiles dense and large dimension tiles.



#### **BENEFITS:**

- Excellent water proofing characteristic
- Fast and Easy mixing
- High Shear strength
- High tensile strength
- Strong and Professional finish
- High Adhesion and flexural strength
- Thermal Deformability
- For Internal or external use
- Excellent slip Resistance on vertical Application
- Superior Whiteness
- Easy to spread



**PACKING:** 20 kg Bag [with double liner packing]

**COVERAGE:** Approx: 30 sq.ft /bag @ 6mm thickness

**COLOUR**: White

**SHELF LIFE:** In unopened condition 12 month manufacture

in the originally sealed packaging.

**STORAGE**: The material should be stored under a shed

and in dry condition away from directs sunlight.

**MIXING**: 1 kg champion NSA White is added to

(200-250)ml of water gradually

[powder: water ratio::1:0.20+0.25] mixed manually or by a speed drill fitted with a stirrer.

- cement plaster
- brick or concrete masonry
- tile on tile
- block work
- concrete
- cement render and screeds
- RCC



# **BLOCK FIX**

Champion Block Fix is a ready to use, self curing and non-shrink block fix mortar. It is a versatile thin jointing material for laying. ACC blocks, fly ask bricks, concrete block etc. It contains Portland cement, graded aggregates and polymer. It is specially designed to provide stronger, much more durable bonding between the blocks.



#### **BENEFITS:**

- No curing Required
- Fast and easy work
- High Bond Strength
- Flexing shock and impact resistant
- Good compressive and tensile strength
- Cost effective

PACKING: 20 kg Bag [with double liner packing]

COVERAGE: Approx: 100 rn.ft /bag @ 4mm thickness

COLOUR: Grey

**SHELF LIFE:** In unopened condition 12 month manufacture

in the originally sealed packaging.

**STORAGE**: The material should be stored under a shed

and in dry condition away from directs sunlight.

**MIXING:** Champion Block fix should be mixed with clear

portable water. take almost 5 to 6 ltr. water for mix 1Bag 20 kg. add powder to water and mix until a uniform lump free consistency achieved.



#### **QUALITY ASSURANCE:**

Champion Construction Chemicals manufactures entire range of construction chemicals under compliance of ISO 9001:2015,In Compliance with European Norms (EN C1E).



# **TILE GROUT**

Champion joint fillers is hard wearing water resistant cost effective polymer modified grout for filling joint in exterior and interior walls, floor tiles excellent bonding strength and suitable for joint width of 1-6 mm.



#### **BENEFITS:**

- Fast & Easy work
- Excellent water proofing characteristic
- Strong and Professional finish
- High Adhesion and flexural strength
- Non shrinking & Non cracking
- For Internal or external use

TILE GROUT

Chumpton

In grand Planton

In the Charter

In the

**PACKING**: 1kg Pouch

**COVERAGE**: Varies with tile and grout width

**COLOUR**: Available in a range of more than 20 colors

**SHELF LIFE**: In unopened condition 24 month manufacture

in the originally sealed packaging

**STORAGE**: The material should be stored under a shed

and in dry condition away from directs sunlight.

#### **HEALTH & SAFETY:**

Champion Joint filler is non-toxic and non-flammable. However, splashes on the skin should be washed well with water and if contact with eye occurs, wash well with water and seek medical advice.

#### **TECHNICAL SERVICES:**

Our laboratory and technical personnel & experts are available to provide additional information and technical assistance, we are eager to work you in resolving your problem.



# **CHAMPION UMBRELLA COAT**

Its two component, polymer modified, flexible and elastic Cementitious water proofing cum anti- carbonation membrane coating. it comprises of standard cement, reinforced fibbers, other additives and liquid polymers. it can be used to all structures that are required to be waterproofed and protected against the ingress of moisture like Basement, water tank, swimming pools, bridge walls, Retaining walls, sewage tanks, Reservoirs,

Dams, Dock gates etc.



#### **BENEFITS:**

- Allows surfaces to breath
- Excellent waterproofing characteristics
- Excellent adhesion Flexibility
- Provide protection against carbonation
- Superior crack bridging & seamless
- High resistance to chloride & other salts

**PACKING**: liquid 5 kg + powder 8 kg Component

**COVERAGE:** Approx: 100 sq.ft / 2 coat **COLOUR:** Brush able consistency Grey

**SHELF LIFE:** In unopened condition 12 month manufacture

in the originally sealed packaging.

**STORAGE**: The material should be stored under a shed

and in dry condition away from directs sunlight.

**APPLICATION**: All leaks and water jets must be stopped. The prepared surface must be thoroughly

wetted for absorption and excess water to be removed. CHAMPION Umbrella coat must be applied in 2-3 uniform coats. mixed by a speed drill fitted with a stirrer and mix till consistence mix achieved. it will remain brush able for 20 minutes@35. C. mixing in small quantities is recommended. for moderate & heavy load areas minimum 2mm

thickness coating is recommended.



All tools must be cleaned with water immediately after use. hardened material should be removed mechanically.

#### **HEALTH & SAFETY:**

Champion Umbrella coat is non-toxic but alkaline in nature and any splashes skin shall be washed off with water.





# **CHAMPION SBR**

Champion SBR is a milky white latex based in a modified styrene butadiene rubber. special adhesive and bonding agent chemicals along with hydrophilic agent. the resulting product is a waterproofing and bonding admixture. improved flexural and tensile strengths. champion SBR gives a versatile performance in many civil engineering applications.



#### **BENEFITS:**

- Very Strong Bonding agent
- Strong Corrosion inhibitor
- Superior waterproofing products
- Easy to use & non-toxic
- High compressive, tensile and flexural strength
- Economical

**PACKING**: 1kg, 5kg, 10kg, 20kg.

**COVERAGE**: Varies depending upon the type of use

**COLOUR**: White

**SHELF LIFE**: In unopened condition 18 month manufacture in the

originally sealed packaging.

**STORAGE**: The material should be stored in dry condition away from

directs sunlight.champion Block fix should be mixed

with clear

# Champion Champion B10 Champion B10 Champion B10 Champion B10 Champion Champion

# **METHOD:**

Application System of CHAMPION SBR consists of applying a primer and when the primer is still tacky apply the mortar. primer is made by mixing Champion SBR, water and cement in various proportions. The mortar consists of cement, sand, water and Champion SBR in various proportions depending upon the type and are of use.

#### **SURFACE PREPARATION:**

surface to receive any repair treatment should be sound, free from loose particles, grease, oil or any deleterious material. All loose portions should be cut back to sound concrete. surface should be sufficiently wetted to saturation level but should be free from stagnant water.

#### **QUALITY ASSURANCE:**

All CHAMPION Branded Products are manufactured under strict Quality control supervision as per exact manufacturing specification. Should you find the behavior of the products varying from the claims in the data sheets, please stop the use of the product and claims the nearest Champion Construction Chemicals staff or the distributor for further guidance.


#### STATEMENT OF RESPONSIBILITY:

CHAMPION branded products when used in accordance with its current published direction for use perform as per the data sheet/catalogue. The Manufacturer and the Distributor will not be responsible for other material and conditions of inferior workmanship.



# **CHAMPION TILE ADHESIVE**

CHAMPION Tile Adhesive is Grey cement based adhesive ensures excellent bond on concrete, Plastered even with thickness 4mm to 6mm and on ceramic and mosaic tile surfaces.

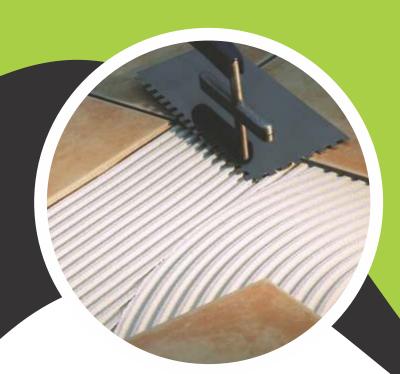

# **PECIFICATIONS**

Appearance	Grey
Pot Life	>120 minutes
рН	Alkaline
Required Water Ratio	30% to 32%
Coverage	30 sq ft/bag (20 kg)
Bulk Density	1.6 - 1.9
Maximum Aggregate Size	0.8 mm

#### **SURFACE PREPARATION:**

Clean the surface thoroughly and remove dust, oil and sealers from surface by using wire brush or by chipping.

#### **MIXING:**

Take water as per ratio of 3:1 and mix it uniformly till attains uniform paste. Stands the material for 5 to 10 minutes One again mix the content and use the mix for application

#### **APPLICATIONS:**

CHAMPION Tile adhesive can be applied directly on concrete, cement screeds, cement, lime, mortar and existing tiles. Dampen the surface before applying the paste The tile to be pre wetted before fixing Apply the mix by steel trowel with thickness 3 to 4 mm Notched trowel can be used to remove excess material Remove excess material by using sponge

#### **SAFETY:**

CHAMPION Tile adhesive is non toxic and contains eco friendly fillers and additive. However being cement based, it is alkaline advised to avoid direct skin or eye contact. In case of eye contact, wash with clean water and seek medical advice.

#### **TECHNICAL SERVICES:**

Customer satisfaction is our Moto. We ensure to not compromise in quality. While new advances and changes will take place, one thing will never change is quality and meeting special needs of customer. We are 24x7 at your services.



# **WALL PUTTY**

Champion wall putty is precisely processed using superior quality chemicals compounds. It's a white cement based putty for exterior and interior walls and celling. It gives most beautiful walls is damp resistant and provides a smooth finish.



#### **BENEFITS:**

- Internal and external safety of home
- Good white color tone. Gives beautiful strong bond with base plaster look like marble finished.
- Save approx 30% of color.
- Long Time brightness
- Easy to Wash
- Weather proof
- Cost Effective
- Super smooth walls

# **SURFACE PREPARATION:**

Clean the surface thoroughly and remove dust, oil and sealers from surface by using wire brush or by chipping.

**PACKING**: 20 kg Bag [with double liner packing]

**COVERAGE:** Approx: 2 to 2.5m2/kg @ 1mm thickness

**COLOUR:** White

**SHELF LIFE:** In unopened condition 12 month manufacture in the originally sealed packaging.

**STORAGE**: The material should be stored under a shed and in dry condition away from directs sunlight.



Champion Wall Putty is non toxic and contains eco-friendly fillers and additive. However being cement based, it is alkaline advised to avoid direct skin or eye contact. In case of eye contact, wash with clean water and seek medical advice

#### **TECHNICAL SERVICES:**

Customer satisfaction is our Moto. We ensure to not compromise in quality. While new advances and changes will take place, one thing will never change is quality and meeting special needs of customer. We are 24x7 at your services.





# **READY MIX PLASTER**

Champion Ready Mix Plaster is a fine quality plaster of Pre mix specially made to give a superior finish to interior walls. It works effectively on both even and uneven surface. It is very economical as it covers more area.



#### **BENEFITS:**

- Consumes less water so it dries quickly
- Easily available and efficient to use
- No wastage of water curing
- Easy to mix, apply and finish because
- it settles gradually
- Free from shrinking and craking
- Ensure full strength
- Excellent adhesive quality



Appearance : Grey Powder

Cement - Sand Ratio: 1:4 (by volume)

Pot life @ 30. C: 30 min

#### **APPLICATION:**

The surface should be free from oil, grease, dust etc. The surface should be moistened with water before plastering. Add approx, 5-6 litter of water in a single bag of 20kg mix. Mix the content with stirrer-mixture for 4-5 minutes. Allow the mix to stable for 2-3 minutes before application. Curing can be done after 24 hrs of application for twice/thrice for at least a week

**PACKING:** 20 kg Bag [with double liner packing] **COVERAGE:** Approx: 20sq.ft /bag @ 6mm thickness

**SHELF LIFE:** In unopened condition 12 month manufacture in the originally sealed packaging.

**STORAGE**: The material should be stored under a shed and in dry condition away from directs sunlight.

#### **TECHNICAL SERVICES:**

Customer satisfaction is our Moto. We ensure to not compromise in quality. While new advances and changes will take place, one thing will never change is quality and meeting special needs of customer. We are 24x7 at your services.

























# **MANUFACTURING By: MARUTI ENTERPRISE**

+91-7878 26 36 26

www.championcontructionchemicals.com